



KBA Rapida 75

Technical information



Ultra compact, user-friendly, space- and energy-saving

Feeder and infeed


Feeder

- New KBA high-performance feeder for handling wide range of substrates
- New design with soundproofing to cut noise emissions
- New sheet separator
- Suction-belt feed table with two suction belts and separately controllable suction chambers
- Automatic format setting
- Nonstop facility

Infeed

- Swing infeed and single-size feed drum
- No cover lay height adjustment when changing substrate
- Diagonal adjustment of infeed line $\pm 0-3\text{mm}$
- Adjustment of the feed line at the infeed

- Pneumatic side lay for mark-free sheet alignment
- Acoustic monitoring of format setting
- Ultrasonic and electromechanical double-sheet detection
- Photoelectric frontlay sensors
- Electropneumatic overshoot protection for double-sheet and frontlay monitoring

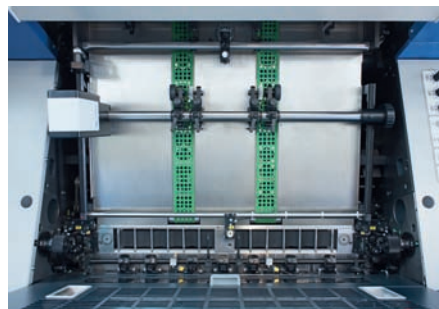



Printing unit

Design principles

- Compact design for greater stability
- Continuous gear train for smoothness and precision
- Unit-type design with 7 o'clock cylinder arrangement
- Corrosion-free cylinder surface finish
- Bearer contact and play-free bearings for precise cylinder rolling
- Two-stage pneumatic impression throw-on/off
- Mechanical bearer cleaning
- Central lubrication for key lubrication points
- Inline perforation and die-cutting

Sheet travel

- Double-size impression cylinders and transfer drums for reliable sheet travel over the full substrate range
- Optimised cylinder geometry for low-curvature, mark-free sheet travel
- Automatic setting of substrate thickness
- Air-blast sheet guides
- Sheet travel sensors for enhanced process reliability

- More stable gripper system for all substrate thicknesses
- Shell-free transfer drum
- Remotely adjustable lateral, circumferential and diagonal register
- Optional online ACR

Semi-automatic plate change (SAPC)

- Automatic plate clamping and tensioning
- Divided rear plate clamps
- Changing time per printing unit less than 1 minute

Inking unit

- Remotely adjustable ink keys, ceramic-coated duct roller
- Abrasion-free ink metering for accurate reproduction
- Speed-compensated duct roller for uniform ink transfer
- Quick-response single-train inking
- Infinitely adjustable oscillation timing
- Quick-set forme roller oscillation
- Ink vibrators pre-configured for inking unit temperature control


Dampening unit

- Speed-compensated film-type dampening
- Differential drive to eliminate hickies

Roller washing

- Individual programming and central control of washing programs
- Dry-cloth washing of blanket and impression cylinders
- Two separate systems for blankets and impression cylinders
- Indication of cloth end and wash consumption
- Simultaneous washing of blankets and impression cylinders to reduce makeready time



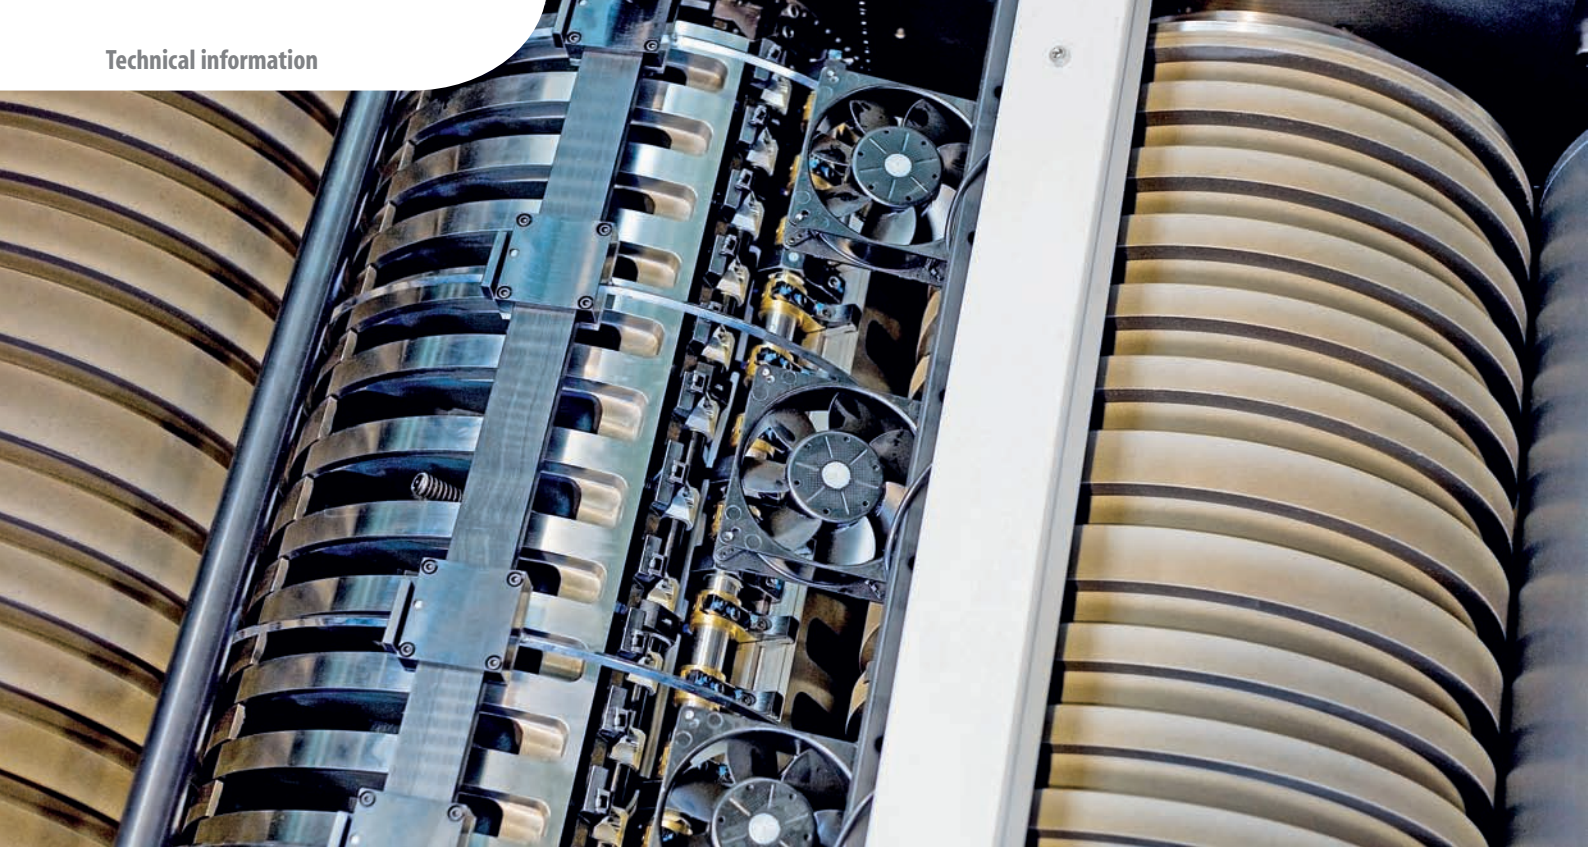

Perfecting and delivery


Delivery


- Blower bank for gentle sheet delivery
- New sheet brake
- Pallet delivery with pile removal possible on three sides
- Danger zone secured by light barriers
- Suction roller with variable speed and suction for smoother sheet delivery
- 1,410mm extension for gentle drying
- Nonstop rake for uninterrupted production during pile change
- Automatic format setting

Three-drum perfecting

- Proven system with double-size drums for handling a broad range of substrates
- Patented perfecting drum gripper system for precise registration
 - Special gripper system to smooth down the rear edge of the sheet
 - Maximum production speed 15,000sph in both straight printing and perfecting mode

- Automatic mode conversion in less than 2 min.
- Durable, ink-repellent coating on post-perfecting impression cylinder
- New, gentle air-blown sheet guides

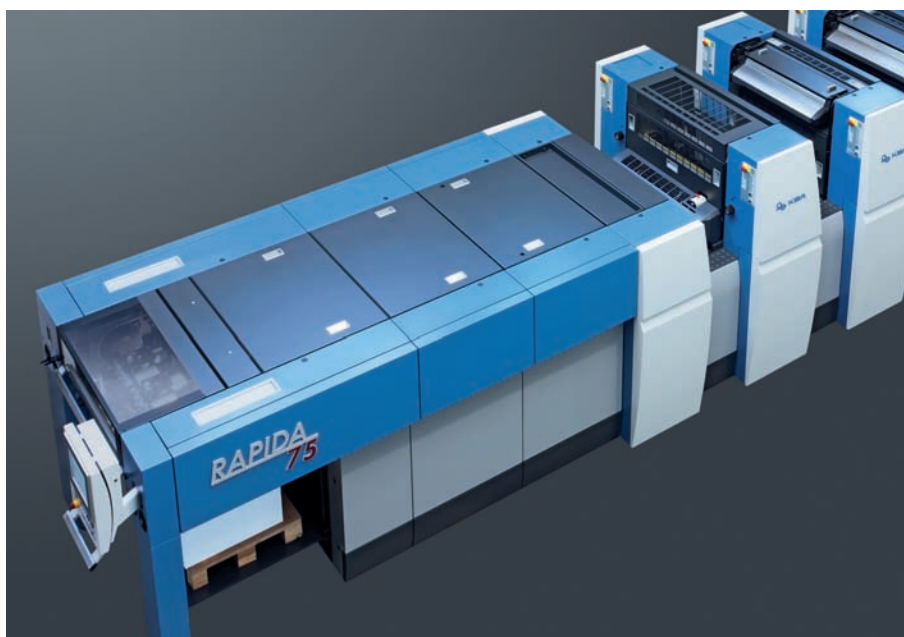

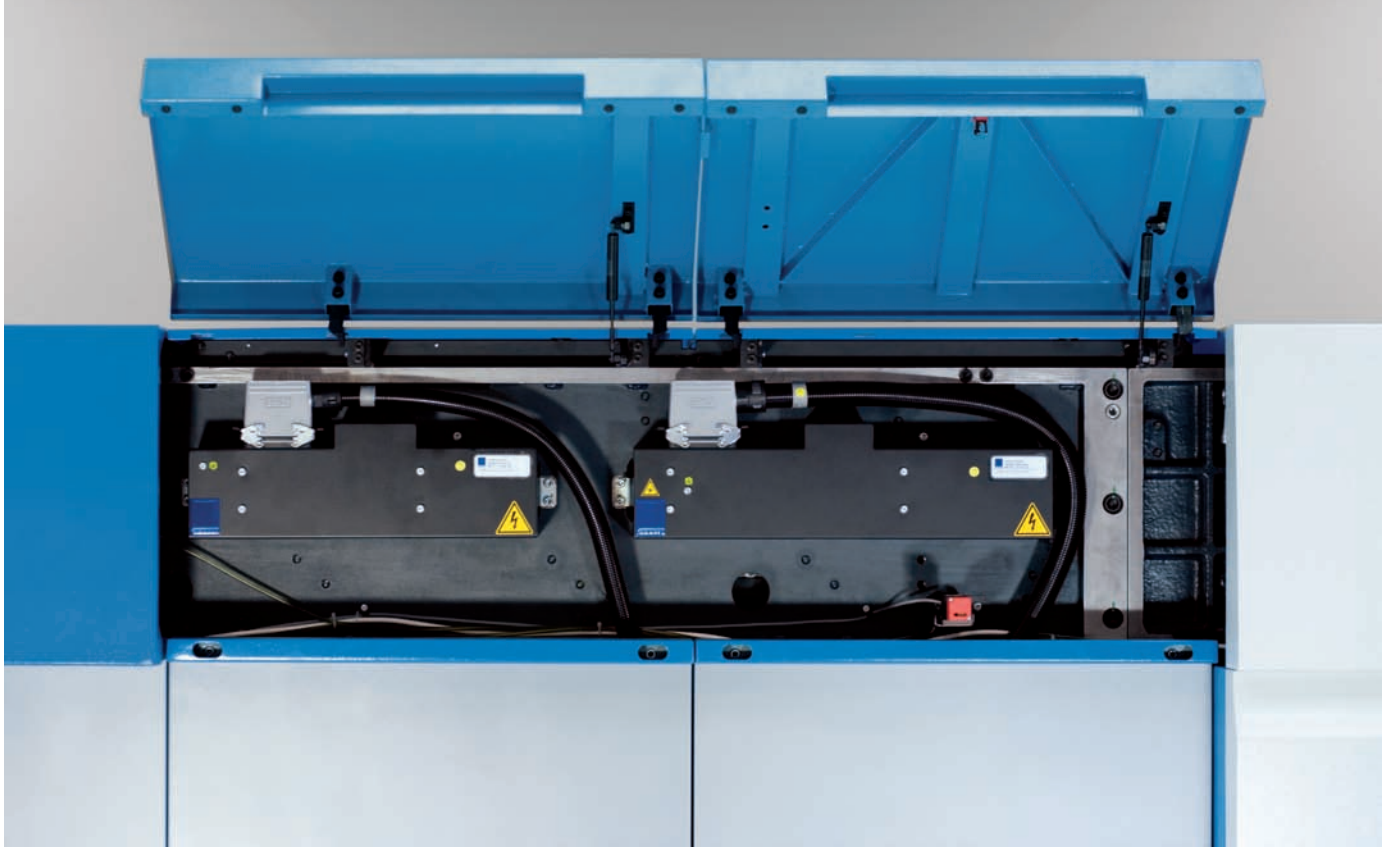

Coating and drying

Coating

- Proven Harris + Bruno chambered doctoring system
- HydroComp blade pressure control for longer blade life
- Lightweight anilox rollers for fast and easy changing
- Automatic coating feed
- Automatic cleaning (1-2 min.)
- Change of aqueous coating in approx. 1-2 min.
- Coating plates possible
- Automatic change of coating plates with register adjustment

UV dryer

- UV modules can be used for end-of-press or interdeck curing
- Plug-in connectors for fast, tool-free module change
- Convenient console operation

IR/hot-air dryers for extended delivery

- Twin quartz lamps with IR power rating of 60 W/cm
- Automatic pile temperature regulation and dryer control
- Dual IR radiation and hot air system
- Multicontrol dryer display

IR/hot-air dryers for delivery

- Infrared/hot-air dryer systems
- Automatic pile temperature regulation and dryer control
- Control via delivery touch screen





Console, quality and the environment

ErgoTronic control console

- Ergonomic control of all press functions via touch-screen
- Controlled press shutdown in the event of power loss
- Job-specific presetting of ink metering
- Remote register adjustment, ACR optional
- Storage of all relevant press parameters for repeat jobs
- CIP4 interface for presetting ink profiles
- Makeready function

Delivery touch-screen

- Remote colour and register setting at delivery via touch-screen, with no console
- Ideal for two-colour presses or where space is limited
- Clear screen layout for intuitive control of all automated press functions

Quality control

Print quality to Fogra standards

DensiTronic

- Automatic ink-density measurement and control

- Detachable measuring head for individual measurements at any point of the sheet

Techkon SpectroDrive

- Semi-automatic ink-density measurement and control
- Detachable measuring head for individual measurements at any point on the sheet
- Control strip freely positionable on sheet
- Low energy consumption (50% less than comparable press)





Specifications

Sheet format		
maximum (standard/option)	530 x 750 / 605 x 750 mm	(20.86 x 29.53in / 23.81 x 29.53in)
minimum	330 x 330 mm	(13 x 13in)
Print format		
(standard/option)	510 x 735 / 585 x 735 mm	(20 x 28.9in / 23 x 28.9in)
Plate format		
(standard/option)	605 x 745 / 660 x 745 mm	(23.81 x 29.3in / 26 x 29.3in)
Blanket format		
	745 x 700 mm	(29.3 x 27.5in)
Substrates¹		
standard	0.04 - 0.6 mm	(0.0016 - 0.002in)
option	0.04 - 0.8 mm	(0.0016 - 0.032in)
Maximum output²		
standard	15,000 sph	
option	16,000 sph	
with 7 units or more	13,000 sph	
Pile height		
feeder	980 mm	(33in)
delivery	920 mm	(36.2in)
Configurations		
	2 to 8 printing units plus coating	

¹ Substrate rigidity also influences printability

² depends on internal operational parameters and the inks and substrates used

Modifications may be made without prior notice. No part of this publication may be reproduced in any way without the manufacturer's permission. Illustrations may depict special features not included in the basic press price.

**The KBA Rapida 75 from
Koenig & Bauer AG**

For further information please contact
our sales departments at:
Koenig & Bauer AG
Radebeul Facility
Friedrich-List-Str. 47
01445 Radebeul, Germany
Tel: (+49) 351 833-0
Fax: (+49) 351 833-1001
kba-radebeul@kba.com
www.kba.com

04/2012-e. Printed in Germany

Our agency:

